

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Рязань (4912)46-61-64
Астана (7172)727-132	Красноярск (391)204-63-61	Самара (846)206-03-16
Белгород (4722)40-23-64	Курск (4712)77-13-04	Санкт-Петербург (812)309-46-40
Брянск (4832)59-03-52	Липецк (4742)52-20-81	Саратов (845)249-38-78
Владивосток (423)249-28-31	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Волгоград (844)278-03-48	Москва (495)268-04-70	Сочи (862)225-72-31
Вологда (8172)26-41-59	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Воронеж (473)204-51-73	Набережные Челны (8552)20-53-41	Тверь (4822)63-31-35
Екатеринбург (343)384-55-89	Нижний Новгород (831)429-08-12	Томск (3822)98-41-53
Иваново (4932)77-34-06	Новокузнецк (3843)20-46-81	Тула (4872)74-02-29
Ижевск (3412)26-03-58	Новосибирск (383)227-86-73	Тюмень (3452)66-21-18
Казань (843)206-01-48	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Калининград (4012)72-03-81	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калуга (4842)92-23-67	Пенза (8412)22-31-16	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Пермь (342)205-81-47	Череповец (8202)49-02-64
Киров (8332)68-02-04	Ростов-на-Дону (863)308-18-15	Ярославль (4852)69-52-93

Единый адрес: beh@nt-rt.ru **Веб-сайт:** www.bhr.nt-rt.ru

Измерители уровня и температуры Nivovent 77-XP Buhler

The new standard for the level and temperature surveillance

- Flange according to DIN 24557 Part 2
- High performance air breather with replaceable filter element
- Visual monitoring of the air breather optional
- Combined, continuous monitoring of level and oil temperature
- Four switching outputs programmable for level or temperature signal
- Optional one analogue output (adjustable current or voltage) each for level and temperature plus 2 or 4 programmable switching outputs
- Highly visible LED display shows the actual temperature in the basic mode, with status indicator of the switching outputs
- Menu structure based on VDMA guidelines
- Switching output adjustable as window or hysteresis
- Two switching outputs adjustable as frequency output (1 to 100 Hz)
- Min/Max memory, logbook function
- Reliable dynamic float system
- Immersion tube in matched lengths up to 1420 mm (55.9") max., other lengths on request



Technical data

NV 77

Basic unit

max. operating pressure	1 bar
operating temperature	-20 °C to +80 °C
min. density of fluid	0.80 kg/cm ³ / SK 604 0.85 kg/cm ³ / SK 221
lengths (mm/inch)	280, 370, 500, 670, 820, 970, 1120, 1270 and 1420 (other lengths upon request)

Air breather filter

grade of filtration	HY Typ Hydac BF 7
accessories	3 µm filling protection cover -not applicable for filling adapters

Material / Building

display housing	MS	VA
float	PA	PA
immersion tube	hard PU	SS 1.4571
flange / filter housing	(SK 604)	(SK 221)
	brass	SS 1.4571
	PA	PA

Level transmitter

measuring resistor	reed contact
resolution	5 mm

Temperature measurement

measuring resistor	Pt 100 (RTD)
	class B, DIN EN 60751
tolerance	± 0,8 °C

Display and control unit

display	XP
operation	four digit seven segment- LED
storage	3 button keypad
current consumption at power up	Min. / Max. values
operating current consumption	approx. 100 mA for 100 ms
supply voltage (U _b)	approx. 50 mA
	10 - 30 V DC
	(rated voltage 24 V DC)

ambient temperature	-20 °C to +70 °C (4 °F to 248°F)
protection class	IP65

units	Level	Temperature
displayed range	%, cm, L, i, Gal	°C / °F
	adjustable	-20 °C to +120°C
	e. g. 0-100%	(4 °F to 248°F)

alarm indicator range	0 °C to 100 °C
	(32 °F to 178°F)

accuracy	1% of the final value
----------	-----------------------

The following cards are optional:

-4S	
connector (base)	2 x M12 - 4 pol
PNP transistor output,	4 x free programmable, selectable allocation for e.g.
	2 x Level / 2 x Temperature
alarm memory	1 x PNP output as alarm logbook
max. current PNP output	0.5 A per output
	Sustained short-circuit proof

-2S-KN-KT	
connector (base)	2 x M12 - 4 pol
PNP transistor output	2 x free programmable, free selectable allocation
alarm memory	1 x PNP output allocable to alarm logbook
max. current PNP output	0.5 A per output
sustained short-circuit proof	

analogue output	Level
programmable as	1 x 4 - 20 mA, 2-10 V, 0-10 V, 0-5 V
load Ω max.	(U _b - 8 V) / 0.02 A




analogue output	Temperature
programmable as	1 x 4-20 mA, 2-10 V, 0-10 V, 0-5 V
load Ω max.	(U _b - 8 V) / 0.02 A

-4S-KN-KT	
connector (base)	1 x M12 - 8 pol
PNP transistor output	4 x free programmable, free selectable allocation
alarm memory	1 x PNP output allocable to alarm logbook
max. current PNP output	0,5 A per output
	sustained short-circuit proof

analogue output	Level
programmable as	1 x 4 - 20 mA, 2-10 V,
	0-10 V, 0-5 V
load Ω max.	(U _b - 8 V) / 0,02 A

analogue output	Temperature
programmable as	1 x 4-20 mA, 2-10 V,
	0-10 V, 0-5 V
load Ω max.	(U _b - 8 V) / 0,02 A

Other output options on request

Connection	S6	2x M12 (base)* ²	M12 (base)
voltage max.	6 pol. + PE	4 pol./4 pol.	8 pol.
contact load max	30 VAC/DC	30 V DC	30 V DC
over all max.	0,5A per output	0,5A per output	0,5A per output
protection class	1A	1A	1A
cable connection	IP 65	IP67* ³	IP67* ³
			

*² Connectors electrically isolated

*³ with casted connector head

on request other connectors

Options / Accessories

- VS** visual clogging indicator for the air breather: analog underpressure indicator, display range 0.35 bar.
- BFA**^{*2} filling adapter incl. ribbed flange with sieve insert: this option allows that small oil quantities can be filled via the air breather housing. Therefore the corresponding housing is equipped with that version.
- SSR**^{*2} stilling tube with support ring and filling adapter: This includes the optional stilling tube as well as the option for filling as the **BFA**. The stilling tube is made of the same material as the requested immersion tube (MS/VA).
- MT** for integration in Multiterminal: The basic unit will be mounted to the Multiterminal. For specification we refer to data sheet DA 10 0201.
- MTS** for integration in Multiterminal including stilling tube: in addition to the basic unit, a stilling tube with support ring is mounted to the Multiterminal.
- FCT** Fluidcontrolterminal: The Fluidcontrolterminal (**FCT**) will be mounted to the basic product. For specification we refer to data sheet DA 10 0202.

^{*2} not available in combination with option **FCT** and **MT/MTS**

Product code for NV 77-XP

Series
Nivotemp **NV 77-XP-HY**
with display and control unit

Resolution
5 = 5 mm

Design
MS brass
VA^{*1} float and switching tube stainless steel

Connector
2M12
M12-8-pol. (with option 4S-KN-KT only)
S6

Length (max. 1420 mm)
280
370
500
670
820
970
1120
1270
1420

NV 77-XP-HY-5

Accessories
VS = clogging indicator

Optionen
BFA^{*2} = filling adapter
SSR^{*2} = stilling tube with filling adapter
FCT = Fluidcontrolterminal
MT = for Multiterminal
MTS = for Multiterminal incl. stilling tube

Card

-4S
4 x PNP transistor output

-2S-KN-KT
2 x PNP transistor output
1 x analogue output level
1 x analogue output temperature

-4S-KN-KT
4 x PNP transistor output
1 x analogue output level
1 x analogue output temperature

^{*1} not available in combination with option **FCT**
^{*2} not available in combination with option **FCT**, **MT** and **MTS**

Accessories

Part-No. 4-pole	Part-No. 8-pole	Description
9144 05 0010	9144 05 0048	Connecting cable M12x1, 1.5 m, elbow connector (female) and straight connector (male)
9144 05 0046	9144 05 0049	Connecting cable M12x1, 3.0 m, elbow connector (female) and straight connector (male)
9144 05 0047	9144 05 0033	Connecting cable M12x1, 5.0 m, elbow connector (female) and wire

You need: Level and temperature measurement with 5 mm resolution, design MS, 2xM12 connector, L=670 mm, clogging indicator, display and control unit with 2 PNP - switching outputs and analog signals for level and temperature


You order: NV 77-XP-HY-5-MS-2M12 / 670-2S-KN-KT-VS

Standard pin assignment NV 77-XP


Type NV 77-XP.-4S 4 x PNP - transistor output free programmable	Type NV 77-XP.-2S-KN-KT 2 x PNP-transistor output free programmable 1 x analogue output level 1 x analogue output temperature	Type NV 77-XP.-4S-KN-KT 4 x PNP-transistor output free programmable 1 x analogue output level 1 x analogue output temperature
<p>Connector 2xM12 4 - pol</p> <p>Display and control unit XP</p> <p>1 +24 V DC 2 S2 out 3 GND 4 S1 out</p> <p>Connector A</p> <p>Connector B</p> <p>Niveau (Level)</p> <p>Pt 100 (RTD)</p>	<p>Connector 2xM12 4 - pol</p> <p>Display and control unit XP</p> <p>1 +24 V DC 2 Temp. out 3 GND 4 Level out</p> <p>Connector A</p> <p>Connector B</p> <p>Niveau (Level)</p> <p>Pt 100 (RTD)</p>	<p>Connector M12 8 - pol</p> <p>Display and control unit XP</p> <p>1 +24 V DC 2 S2 out 3 GND 4 S1 out 5 S3 out 6 S4 out 7 Level out 8 Temp. out</p> <p>Connector A</p> <p>Niveau (Level)</p> <p>Pt 100 (RTD)</p>
<p>Connector S6</p> <p>Display and control unit XP</p> <p>1 +24 V DC 2 GND 3 S1 out 4 S2 out 5 S3 out 6 S4 out</p> <p>Pt 100 (RTD)</p> <p>Niveau (Level)</p>	<p>Connector S6</p> <p>Display and control unit XP</p> <p>1 +24 V DC 2 GND 3 Level out 4 Temp. out 5 S1 out 6 S2 out</p> <p>Pt 100 (RTD)</p> <p>Niveau (Level)</p>	

Flange picture


after DIN 24557/part 2




Float SK 604 for NV 77-XP-MS




Float SK 221 for NV 77-XP-VA



Basic version

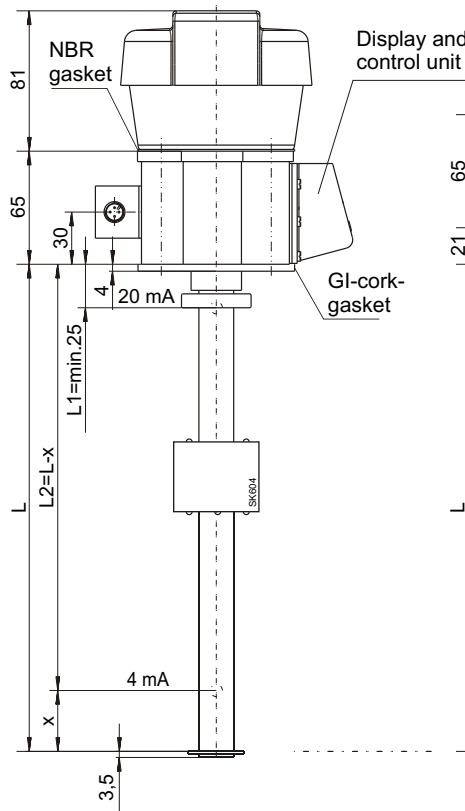

Design with options

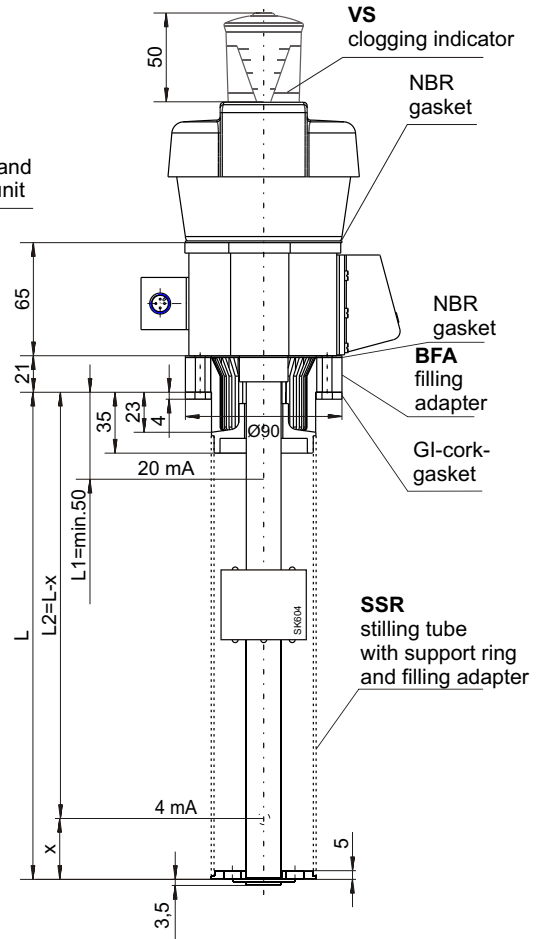

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Рязань (4912)46-61-64
Астана (7172)727-132	Красноярск (391)204-63-61	Самара (846)206-03-16
Белгород (4722)40-23-64	Курск (4712)77-13-04	Санкт-Петербург (812)309-46-40
Брянск (4832)59-03-52	Липецк (4742)52-20-81	Саратов (845)249-38-78
Владивосток (423)249-28-31	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Волгоград (844)278-03-48	Москва (495)268-04-70	Сочи (862)225-72-31
Вологда (8172)26-41-59	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Воронеж (473)204-51-73	Набережные Челны (8552)20-53-41	Тверь (4822)63-31-35
Екатеринбург (343)384-55-89	Нижний Новгород (831)429-08-12	Томск (3822)98-41-53
Иваново (4932)77-34-06	Новокузнецк (3843)20-46-81	Тула (4872)74-02-29
Ижевск (3412)26-03-58	Новосибирск (383)227-86-73	Тюмень (3452)66-21-18
Казань (843)206-01-48	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Калининград (4012)72-03-81	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калуга (4842)92-23-67	Пенза (8412)22-31-16	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Пермь (342)205-81-47	Череповец (8202)49-02-64
Киров (8332)68-02-04	Ростов-на-Дону (863)308-18-15	Ярославль (4852)69-52-93

Единый адрес: beh@nt-rt.ru **Веб-сайт:** www.bhr.nt-rt.ru